

TP8000 Series

- Powerful Intel Pentium® 4 CPU options
- Resistive or Infrared touch interface options
- Space saving design
- Optional built-in UPS battery
- Optional 2nd display
- Removable 2.5" HDD in base stand
- Wallmount option



Posiflex TP8000 Terminal Series

The TP8000 Terminal Series is an Intel based all-in-one touch terminal designed for hospitality, retail and vertical markets that require increased performance at the front-end workstation. Featuring 15" high-luminance resistive or infrared touch panel options to meet any application requirement. With a unique space saving design, the base stand houses a primary hard drive, rear mount bracket for an optional 2nd display and optional built-in UPS battery. The TP8000 optimizes 'WEPOS' (Microsoft® Windows Embedded for Point-of-Service) for "Plug-n-Play" functionality and is ideal for hospitality, retail, gaming, kiosk, healthcare, c-store, petroleum, grocery, and a variety of vertical markets.

For more information call (888) 968.1668 today!



www.posiflexusa.com



TP8000 Series

Leaders in POS Terminal Technology

Function	TP8015	TP8415
Processor	Intel Celeron® 2.0 HGz	Pentium P4 2.4GHz
Memory	512MB Standard DDR (expandable to 2GB)	
Video Memory	16 ~ 128MB shared memory	
Power Supply	Input: 100 ~ 240V, Output: 12V/150W AC adaptor	
Housing	Aluminum Alloy	
Mounting	Base stand or wallmount (optional)	
OS Support	Microsoft® WIN XP Pro / WEPOS	
Safety Certifications	PSU: UL / VDE / T mark Terminal: FCC, CE (meet IEC 100-4-2 class A)	
Display		
LCD	1024 x 768	
Touch Sensor	Resistive or Anti-scratch Infrared type	
Touch Controller	RS232 (optional PS/2 interface)	RS232
Tilt Adjustment	From 17.5 to 87.5	
Expansion		
Storage Device	2.5" HDD, 40GB	
Mounting Option	Desktop or wallmount (optional)	
Connectivity		
Audio Port	1 w/ 2 slim type speakers in cable cover	
Mouse Port	1 PS/2	
LAN Port	10/100 MHz base Ethernet	
Parallel Port	1	
Serial Port	4 ports with +5V DC support	
KB Port	1 PS/2	
USB Port	6	
VGA Port	1 (external)	
CR Port	1 port controls 2 devices (under COM1)	
Environment		
Operation Condition	0°C ~ +40°C or 32°C ~ 104°C (with or without UPS battery) 20%RH ~ 80%RH, non-condensing, max. wet bulb 26°C (78.8°F)	
Storage Condition	20°C ~ +60°C (4°F ~ +140°F) without UPS battery, -20°C ~ +40°C (-4°F ~ +104°F) with UPS battery, 10%RH ~ 80%RH, non-condensing, max. wet bulb 28.9°C (84.0°F)	
Options		
2nd LCD Display	LM6000 Series	
Customer Pole Display	PD2501B: 11mm, 2x20 VFD display, 5x7 dot matrix, RS232 interface PD2200B-110FB: 11mm, 2x20 VFD display, RS232 interface PD-302B: 9mm, 2x20 LCD display, 5x7 dot matrix, RS232 or USB interface	
SD-200 Magnetic Card Reader	2-Track: SD2000037 / SD2008007 / SD2008037 (w/ Fingerprint) 3-Track: SD2009007 / SD2009037 (w/ Fingerprint)	
UPS Battery	Yes	




ALL JIVA TERMINAL MODELS CAN BUNDLE WITH

- SD200 Series 2-in-1 Attachment MSR and/or U.are.U Finger Print Sensor
- CR6000 Series Cash Drawer
- PP7000 Series Aura Thermal Receipt Printer
- PD2000 Series Pole Display or PD302 Customer Display
- LM6000 Series 12" 2nd LCD Display



Port Configurations

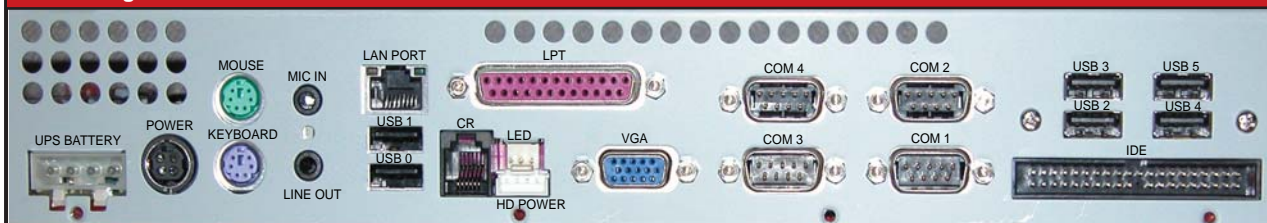

About Posiflex

Established in 1984, Posiflex is recognized as a leading provider of innovative Point-of-Service (POS) hardware and platform technology used in diverse markets. Posiflex partners with applications software developers to provide reliable POS terminal systems to the hospitality, healthcare, medical, retail and specialized markets. The Company's products are sold through industry specialists, value-added resellers and distributors. All products are designed and manufactured in Taipei, Taiwan in two ISO 9001/9002/14001 certified laboratories and factories. Posiflex USA is located just north of the Silicon Valley, in Hayward, California. For additional information on Posiflex and the diverse product line, visit www.posiflexusa.com or call 888.968.1668.

POSIFLEX™
Leaders in POS Terminal Technology

30689 Huntwood Avenue
Hayward, CA 94544
Toll-free: 888.968.1668
Phone: 510.429.7097
Fax: 510.475.0982
e-mail: sales@posiflexusa.com