


LC6000 TECHNICAL SPECIFICATIONS

Connector Assignment

Industrial Computer - LC6000

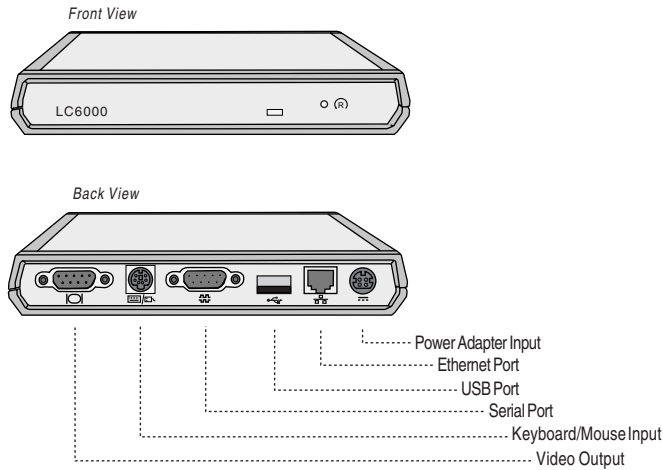

Industrial Computer - LC6000

SYSTEM

Processor	Intel Compatible 133MHz 486DX2
Memory	32MB to 64MB SDRAM
Hard Drive	Internal Compact Flash, 16MB to more than 4GB
Video	Resolution: 1280 x 1024 pixels max. Color: up to 16 million colors (True Color)
Network Interface	10/100 Base-T Ethernet
USB Port	USB 1-1
Serial Port	COM1 COM2 (internal connection)
Keyboard/Mouse	PS/2 Compatible
Parallel Port	LPT1 (internal connection)
IDE Port	Primary IDE (internal connection)
Supported Operating Systems	Windows CE/98, DOS, Red Hat Linux 7.3

ELECTRICAL (External Switching Power Adapter - included)

Input	100 to 240VAC, 25W
Frequency	47 to 63 Hz
Output	5.0VDC at 1A 2.5VDC at 2A
Output Ripple	< 150 mVPP

MECHANICAL

Weight	2.3 lbs
Dimension (in inches)	6.3W x 1.0H x 5.1D
Housing	zinc die cast

ENVIRONMENT

Operating Temperature	5°C to 40°C
Relative Humidity	8 to 80%, non-condensing
Storage Temperature	0°C to 60°C
Relative Humidity	5 to 80%, non-condensing

CONNECTORS

SVGA	Standard, DB15 female connector
Keyboard & Mouse	PS/2 mini-DIN6 female connector
RS232	Standard DB9 male connector
USB	Standard USB type-B connector
Ethernet	RJ45 8 pin female connector
DC Power	Shielded snap lock mini-DIN with EMI/RFI suppression, female connector